





Military & Space > 20 to 50 MHz > VHF Space Qualified Crystal Oscillator (TCXO)

- Temperature Compensated
- MIL-PRF-55310 S-Level Process Flow
- High Reliability HF Oscillator for Space
- Level 1 and Level 2 Models Available
- Radiation Hardness to 100 krad Standard, higher levels upon request
- Custom Specifications Readily Available

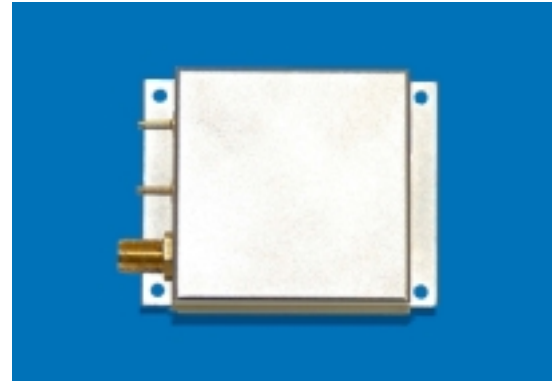

The Space Qualified Crystal Oscillator is a small temperature compensated VHF oscillator, which incorporates a Z-swept, premium Q, synthetic resonator per MIL-PRF-3098. The unit operates at a fixed frequency between 20 and 50 MHz and uses space qualified semiconductors, passives, and ICs.

The oscillator exhibits excellent aging rates of 5×10^{-9} /day and 1×10^{-6} /year for extended mission life. The low phase noise performance is derived from designs that have made Wenzel a leading manufacturer of commercial, military, and space oscillators. This oscillator can be built and screened to MIL-PRF-55310 (Class 1) Product level S or B, or to EEE-INST-002 Levels 1, 2 or 3.

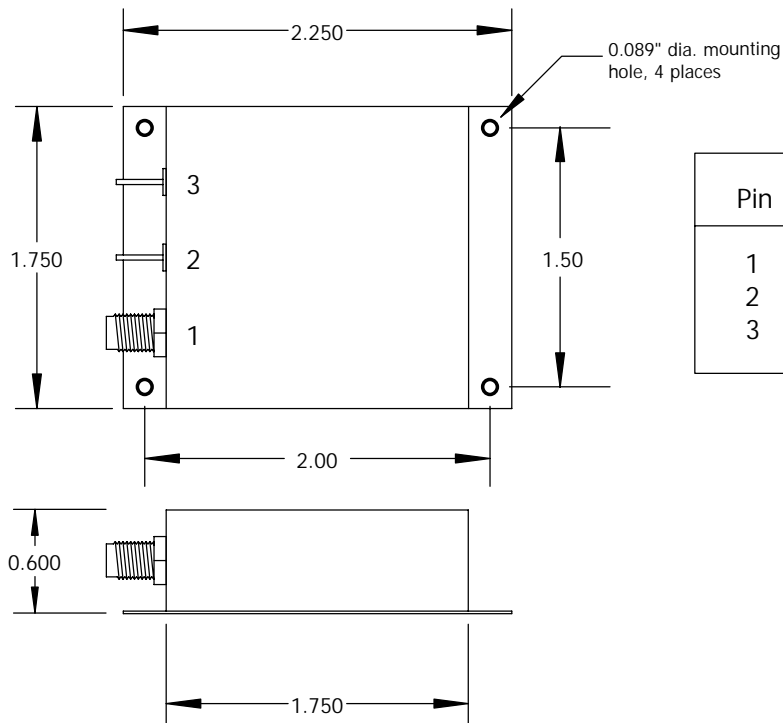

Pin	Function
1	RF Output
2	Ground
3	Supply Voltage



Military & Space > 20 to 50 MHz > VHF Space Qualified Crystal Oscillator (TCXO)

GENERAL REQUIREMENTS

Material, Design and Construction	MIL-PRF-55310
Parts and Materials List	Supplied
Parts, Materials	EEE-INST-002 Level 2 at a minimum, JANS Semiconductors, Established Reliability Passives and space quality ICs, when available.
Crystal	20 to 50 MHz (fixed, please specify), premium Q, Z-swept, synthetic quartz
Outgassing	TML<1% and CVCM <0.1% per
Traceability	Serial number, lot and date code tracking
De-rating	per EEE-INST-002, (JPL-D-8545, alternative)
Soldering	J-STD-001 class 3
Case	Nickel-plated aluminum housing
Finish	Electroless nickel per AMS 2404 (MIL-C-26074)

ELECTRICAL PERFORMANCE

RF Output Frequency	20 to 50 MHz (fixed, please specify), sine wave
Frequency Accuracy (initial)	$\pm 1 \times 10^{-6}$ at +25°C
Frequency Stability	$\pm 5 \times 10^{-6}$ for -10°C to +50°C (ref +25°C)
	$\pm 2 \times 10^{-6}$ for 0°C to +40°C (ref +25°C)
Aging Rate (after 90 days operating)	
1 day	$\pm 5 \times 10^{-9}$
1 month	$\pm 8 \times 10^{-8}$
RF Output Power	+10 dBm ± 1.5 dB into 50Ω
RF Output Harmonics	<-30 dBc
RF Output Spurious	<-100 dBc, 100 KHz to 1 GHz
Phase Noise <u>Static</u>	(50 MHz)
100 Hz	-110 dBc/Hz
1 KHz	-135 dBc/Hz
10 KHz	-160 dBc/Hz
Supply voltage	+12 VDC $\pm 2\%$, 50 mV pp ripple, 200 kHz to 300 kHz
Total power	<50 mA, steady state at +25C at 760 Torr

ENVIRONMENTAL CONDITIONS

Operating temperature	-10°C to +50°C
Storage temperature	-40°C to +105°C
Design / Qualification	-10°C to +50°C
Ambient pressure	Atmospheric (760 torr), Vacuum (<5 x 10 ⁻⁵ torr)
Radiation, design to meet	TID 100 krad/si

MECHANICAL SPECIFICATIONS

Size	2.25" x 1.75" x 0.6"
Weight	<75 grams, max.
Physical	Non-hermetic, vented enclosure

MODEL DEFINITIONS

EM (Engineering Model)	Design and Construction similar in appearance and identical in form, fit, and function to FM. Developed using best commercial practice, including commercial parts and materials. EM shall be subjected only to electrical tests, with no environmental testing performed.
FM (Flight Model)	Fabricated to meet all design, construction, and test requirements. FM shall be subjected to the entire compliment of electrical and environmental acceptance tests.



Military & Space > 20 to 50 MHz > VHF Space Qualified Crystal Oscillator (TCXO)

QUALIFICATION TESTS (Non-flight model, only)

Group I (6 samples)	Visual, Electrical Tests*
Burn-In (operational)	240 hours minimum at +60°C
Group II (6 samples)	
Aging	30 Days
Group III Subgroup 1 (6 samples)	
Random Vibration	11.95 Grms, MIL-STD-202, method 214 I-D, 50 to 2000 Hz, 5 min per axis
Shock	MIL-STD-202, Method 213, Condition A, 50G, 11msec
Group III Subgroup 2 (3 samples)	
Thermal Shock	MIL-STD-202, Method 107, Condition A-1, 25 cycles, -55°C to +85°C
Ambient Pressure	MIL-STD-202, Method 105, at $<5 \times 10^{-5}$ torr
Group III Subgroup 3 (1 sample)	
Resistance to Soldering Heat	MIL-STD-202, Method 210, Condition A
Group III Subgroup 4 (1 sample)	
Terminal Strength	MIL-STD-202, Method 211, Condition C, Not applicable for pins $<0.25"$
Solderability	MIL-STD-202, Method 208
Resistance to Solvents	MIL-STD-202, Method 215 Not applicable when marking is electro-etched
Electrical Tests*	
Radiographics	MIL-STD-202, method 209

ACCEPTANCE TESTS (Flight Model)

Electrical Tests*	
Thermal Shock	MIL-STD-202, Method 107, Condition A, 5 Cycles, -55°C to +85°C
Random Vibration (non-operational)	7.56 Grms overall, 50 to 2000 Method 214 I-B, 50 to 2000 Hz, 5 min per axis
Electrical Tests*	
Burn-In (operational)	240 hours minimum at +50°C
Aging Rate	Projected after 30 days operating
Electrical Tests*	
Radiographics	MIL-STD-202, method 209

*ELECTRICAL TESTS

Tested at ambient pressure $<5 \times 10^{-5}$ torr and at -10, +25, and +50°C unless otherwise noted

Warm-Up Power (-10°C only)
Warm-Up Time (-10°C only)
Input Power
Cold Start (-10°C)
Hot Start (+50°C)
RF Output Power
RF Output Harmonics
RF Output Spurious
Frequency Accuracy (+25°C only)
Frequency Stability
Phase Noise - Static (+25°C only, 760 torr)

ANALYSES

Thermal Analysis, Component Stress Analysis