

REV	DATE	REVISION RECORD	DWN	AUTH
-	02-21-95	Draft	BH	
A	02-20-96	Revise Can	BH	
B	04-07-98	Revise Can	KW	BK
C	08-30-00	Revise Can	KP	KW

OUTPUT

Frequency

50 MHz

Level

+13 dBm ±2dB into 50 ohms

STABILITY

Aging

±1 x 10⁻⁶ per year

after 30 days operating, typical

Phase Noise L(f)

100 Hz -130 dBc/Hz

1 kHz -150 dBc/Hz

10 kHz -165 dBc/Hz

20 kHz -165 dBc/Hz

Temperature Stability

±5 x 10⁻⁷, 0° to +50°C (Ref +25°C)

MECHANICAL

Dimensions

2 x 2 x 0.75"

Connectors

SMA and feedthru capacitor

Packaging

Sealed steel can

POWER REQUIREMENTS

Warm-Up Power

<5 Watts for 5 minutes

Total Power

2.7 Watts at +25°C

Supply Voltage

+15 VDC

ADJUSTMENT

Mechanical Tuning

±3 x 10⁻⁶

Electrical Tuning



±5 x 10⁻⁷, ±5 VDC

Negative Slope


CRYSTAL

Type

50 MHz SC-cut

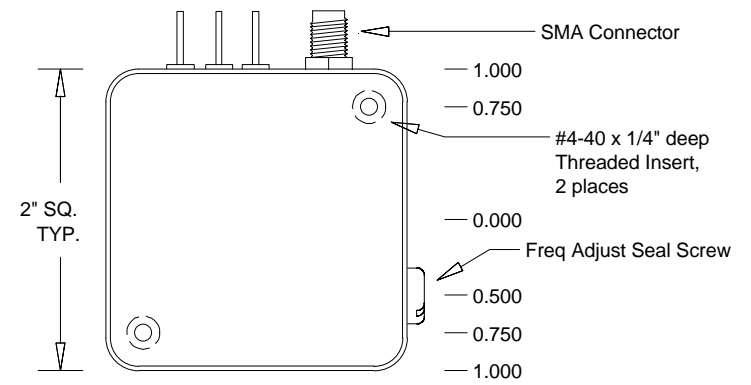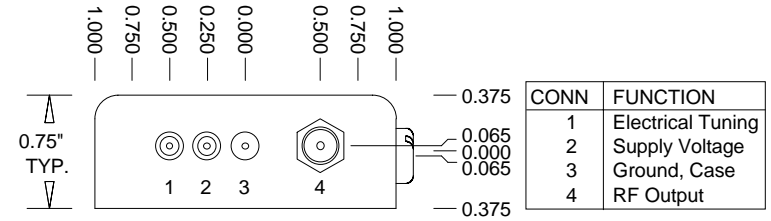

Connector numbers are for reference only, they are not marked on unit.

 Wenzel Associates, Inc. Austin, Texas				
Title:				
Standard 50 MHz-SC Sprinter Crystal Oscillator				
P/N:	Rev:	Date:	Drawn:	Ref:
501-04543	C	08-30-00		
Tolerances: (except as noted) Dimensions are in inches	0.XX Dec: ±0.030"	0.XXX Dec: ±0.010"	FSCM: 62821	Page 1 of 1