

INPUT - Selectable**Frequency**

5 MHz, -2 to +17dBm into 50 ohms

OUTPUT – 5 MHz**Frequency**

5 MHz, +10dBm ±2 dB

Phase Noise

1 Hz -110 dBc/Hz
 10 Hz -140 dBc/Hz
 100 Hz -155 dBc/Hz
 1 kHz -160 dBc/Hz
 10 kHz -160 dBc/Hz

Harmonics, Subs, Spurious

-25, -85, -85 dBc

OUTPUT – 100 MHz**Frequency**

100 MHz, +12dBm ±2 dB

Output Phase Noise L(f)**Locked to Internal 5 MHz**

10 Hz -103 dBc/Hz
 100 Hz -118 dBc/Hz
 1 kHz -140 dBc/Hz
 10 kHz -160 dBc/Hz

Harmonics, Subs, Spurious

-25, -85, -85 dBc to 600 MHz

Loop BWTarget Bandwidth: 40 Hz, typical,
type 2 Loop**STABILITY****Aging**±5 x 10⁻¹⁰ per day after 30 days
operating typical**Temperature Stability**±1 x 10⁻⁸ without external input
-10 to +65°C, (Ref. +25°C)**Phase Lock Alarm - TTL**Locked: +3.5 to +5.2 VDC (Hi)
Unlocked: +0.8 VDC max (Lo)**Phase Lock Voltage Monitor**Voltage monitor pin supplied,
0 to +7.5 VDC range**Warm-Up**7 minutes to 1 x 10⁻⁷ of final
frequency at 30 minutes at +25°C**MECHANICAL****Dimensions**

2.5 x 6.0 x 0.9"

ConnectorsSMA's
7 Pin D-subminiature, male**Packaging**

Nickel plated machined brass housing

POWER REQUIREMENTS**Supply Voltage**

+12 ±0.5VDC

Warm-Up Power12.6 Watts maximum at start-up for 5
minutes at +25° C**Total Power**

6 Watts, typical, steady state +25°C

ADJUSTMENT**Electrical Tuning**

?.3 to +-.6 ppm, 0 to +7 VDC
 ?.05 ppm of nominal at +3.5 volts, at room
 temperature, at time of shipment
 Negative Slope
 Suitable for use with a 100 k ohm pot

V Reference

+8 VDC, typical, buffered by 10 k ohms

Internal 100 MHz Tuning

8 to 11 ppm, 0 to +7.5 VDC

SPECIAL**Reference Select Switch – Internal 5 MHz
By Pass**

>+4.0 Volts enables external reference,
 bypassing internal 5 MHz
 <+1.0 Volts disables external

REV	DATE	REVISION RECORD	DWN	AUTH
-	06-23-04	Draft	BH	Liz
A	03-27-09	Aging, Test Data	BH	

**Wenzel Associates, Inc.**

Austin, Texas


Title:

Standard 5 and 100 MHz Phase Locked Oscillator

P/N: 501-12916	Rev: A	Date: 03-27-09	Drawn:	Ref:
--------------------------	------------------	--------------------------	--------	------

Tolerances: (except as noted) Dimensions are in inches	0.XX Dec: ?0.030"	0.XXX Dec: ?0.010"	FSCM: 62821	Page 1 of 2
--	-----------------------------	------------------------------	-----------------------	-------------

REV	DATE	REVISION RECORD	DWN	AUTH
-	06-23-04	Draft	BH	Liz
A	03-27-09	Aging, Test Data	BH	

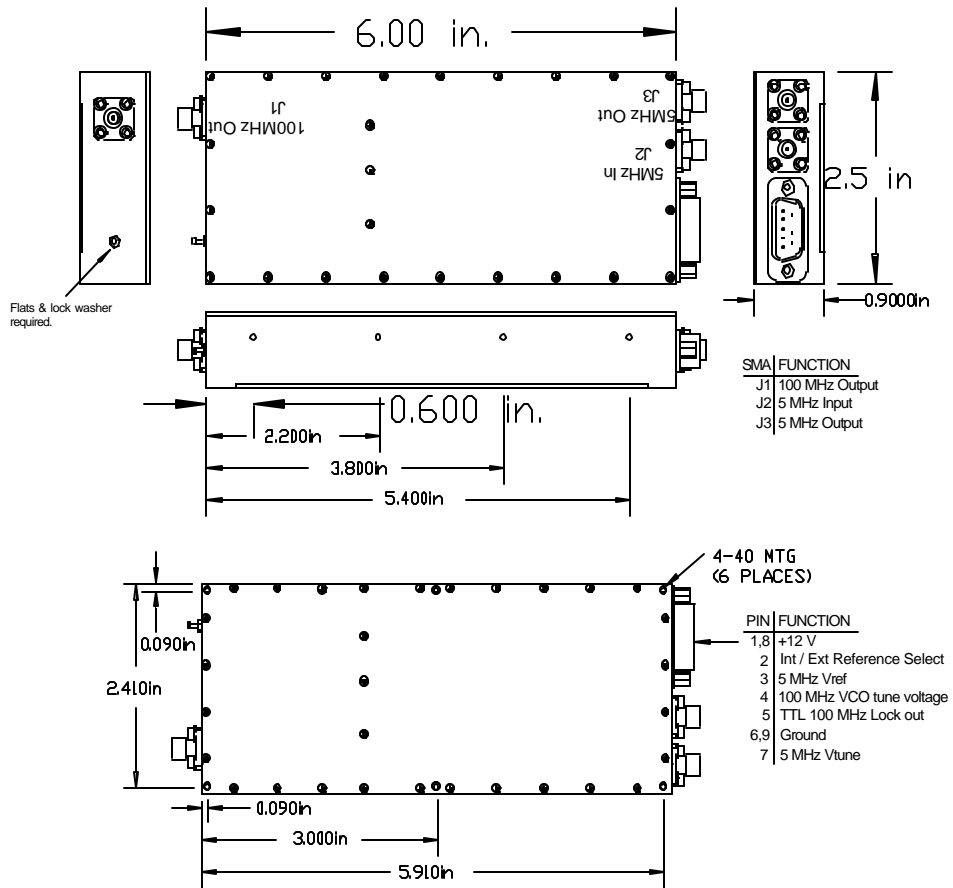

Wenzel Associates, Inc.

Austin, Texas

Title:

Standard 5 and 100 MHz Phase Locked Oscillator

P/N:

501-12916

Rev:

A

Date:

03-27-09

Drawn:

Ref:

Tolerances:
(except as noted)
Dimensions are in inches

0.XX Dec:
?0.030"

0.XXX Dec:
?0.010"

FSCM:
62821

Page **2** of **2**