

OUTPUT

Frequency

10 MHz

Level

+13 dBm ±2dBm into 50 ohms

STABILITY

Aging

1 x 10⁻⁹ per day
after 30 days operating, typical

Phase Noise L(f)

10 Hz -141 dBc
100 Hz -161 dBc
1 KHz -168 dBc
10 KHz -168 dBc

Temperature Stability

±5 x 10⁻⁸, 0° to +50°C (Ref +25°C)

Sub-Harmonics

-30 dBc

MECHANICAL

Dimensions

1.75 x 2.94 x 1"

Connectors

SMA and solder pins on side

Packaging

Solder sealed steel can

POWER REQUIREMENTS

Warm-Up Power

5 Watts for 5 minutes

Total Power

3 Watts at +25°C

Supply Voltage

+15 VDC

ADJUSTMENT

Mechanical Tuning

±1 x 10⁻⁶

Electrical Tuning

±2 x 10⁻⁷, ±5 VDC



Negative slope

CRYSTAL

Type

5 MHz SC-cut with a x2 multiplier

REV	DATE	REVISION RECORD	DWN	AUTH
-	11-14-06	Draft	YR	BH

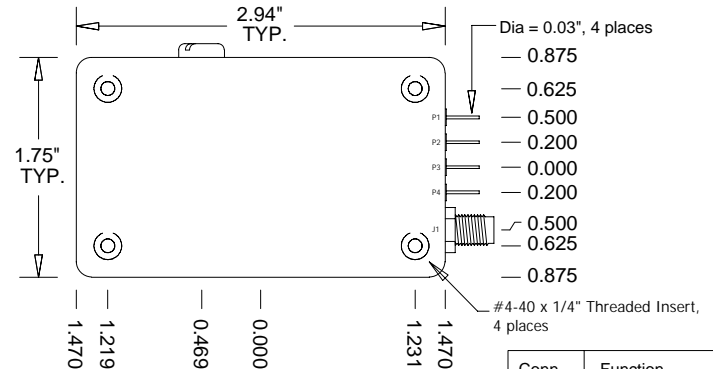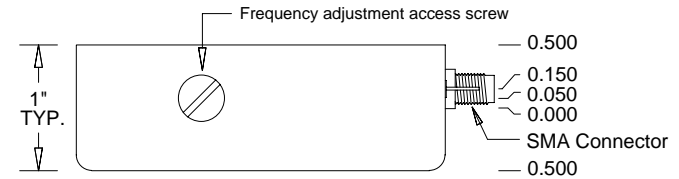

Connector numbers are for reference only, they do not appear on unit.

Conn	Function
J1	RF Output
P1	N/C
P2	Electrical Tuning
P3	Supply Voltage
P4	Case Ground



Wenzel Associates, Inc.

Austin, Texas

Title:

Standard 5 MHz-SC x 2 Ultra Low Noise Crystal Osc.

P/N: 501-16836	Rev: -	Date: 11-14-06	Drawn:	Ref:
--------------------------	-----------	--------------------------	--------	------

Tolerances: (except as noted) Dimensions are in inches	0.XX Dec: ±0.030"	0.XXX Dec: ±0.010"	FSCM: 62821	Page 1 of 1
--	-----------------------------	------------------------------	-----------------------	-------------