

EV	DATE	REVISION RECORD	DWN	AUTH
-	07-22-08	Draft	VG	
A	01-22-09	Updated Drawing	PAC	
B	04-08-09	Updated Drawing	PAC	
C	02-11-09	Title Block	VG	

**OUTPUT**

**Frequency** 100 MHz

**Level**

+13 dBm ±2 dB into 50 ohms

**STABILITY**

**Aging**

1 x 10<sup>-6</sup> per year  
after 30 days operating, typical

**Phase Noise L(f)**

100 Hz -130 dBc/Hz  
1 kHz -158 dBc/Hz  
10 kHz -176 dBc/Hz  
100 kHz -176 dBc/Hz

**Temperature Stability**

±2 x 10<sup>-7</sup>, 0° to +60°C (Ref +25°C)

**MECHANICAL**

**Dimensions**

1.835 x 1.865 x 0.75"

**Connectors**

SMA(f) and solder pins on side

**Packaging**

Nickel-plated machined aluminum case

**POWER REQUIREMENTS**

**Warm-Up Power**

≤ 5 Watts for 5 minutes

**Total Power**

≤ 2.7 Watts at +25°C

**Supply Voltage**

+15 VDC ±5%

**ADJUSTMENT**

**Mechanical Tuning**

±4 x 10<sup>-6</sup>

**Electrical Tuning**

±2 x 10<sup>-7</sup>, ±5 VDC

Negative slope

**CRYSTAL**


**Type**


100 MHz, Low g

**SPECIAL**

**Acceleration Sensitivity**

≤ 5 x 10<sup>-10</sup> /g per axis  
Guaranteed

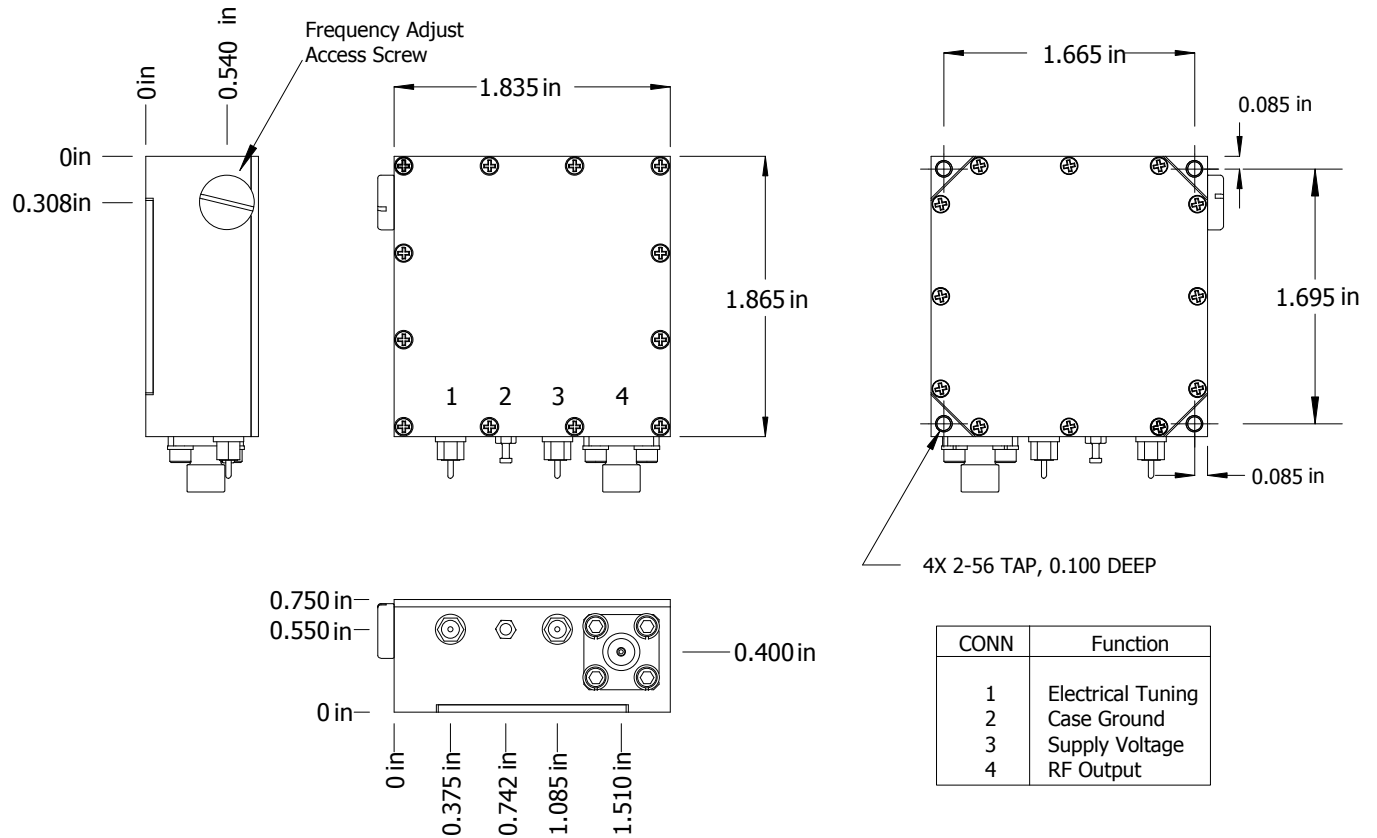

 <b>Wenzel Associates, Inc.</b> Austin, Texas				
Title:				
<b>100 MHz-SC Citrine Ultra Low Noise Crystal Oscillator</b>				
P/N:	Rev:	Date:	Drawn:	Ref:
<b>501-19459</b>	<b>C</b>	<b>02-11-09</b>		
Tolerances: (except as noted) Dimensions are in inches		0.XX Dec: <b>±0.030"</b>	0.XXX Dec: <b>±0.010"</b>	FSCM: <b>62821</b>
				Page 1 of 1