

REV	DATE	REVISION RECORD	DWN	AUTH
-	04-13-07	Draft	SS	LR

INPUT

Frequency

10 MHz, $\pm 2 \times 10^{-6}$

Level

+7 dBm ± 5 dB into 50 ohms

OUTPUT

Frequency

100 MHz

Level

+13 dBm ± 2 dB into 50 ohms

STABILITY

Output Phase Noise L(f)

(Free-Running)

100 Hz -125 dBc/Hz

1 kHz -155 dBc/Hz

10 kHz -170 dBc/Hz

Aging

$\pm 1 \times 10^{-6}$ per year after 30 days operating, typical

Temperature Stability

$\pm 5 \times 10^{-7}$ free-running from 0 to +50°C, (Ref. +25°C)

Harmonics

-30 dBc

Sub-Harmonics and Products

-50 dBc

Non-Harmonic Spurious, typical

-70 dBc

Phase Lock Alarm

TTL

Locked: +3.5 VDC to +5.2 VDC (Hi)

Out-of-Lock: +0.8 VDC max (Lo)

Phase Lock Voltage Monitor

Voltage monitor pin supplied

MECHANICAL

Dimensions

2.5 x 3.5 x 0.8"

Connectors

SMA's and solder pins on side
Feed-thru terminals for lock alarm, supply and phase lock voltage monitor

Packaging

Machined aluminum housing

Mounting

Threaded inserts on sides, 16 places

Through holes, 4 places

Threaded inserts on base, 4 places

POWER REQUIREMENTS

Supply Voltage

+15 VDC

Warm-Up Power

8 Watts at start-up for 5 minutes at +25°C

Total Power

5 Watts at steady state +25°C

ADJUSTMENT

Loop BW

Target Bandwidth: 100 Hz
Type 2 Loop


CRYSTAL

Type

SC-cut

OTHER

ROHS compliant

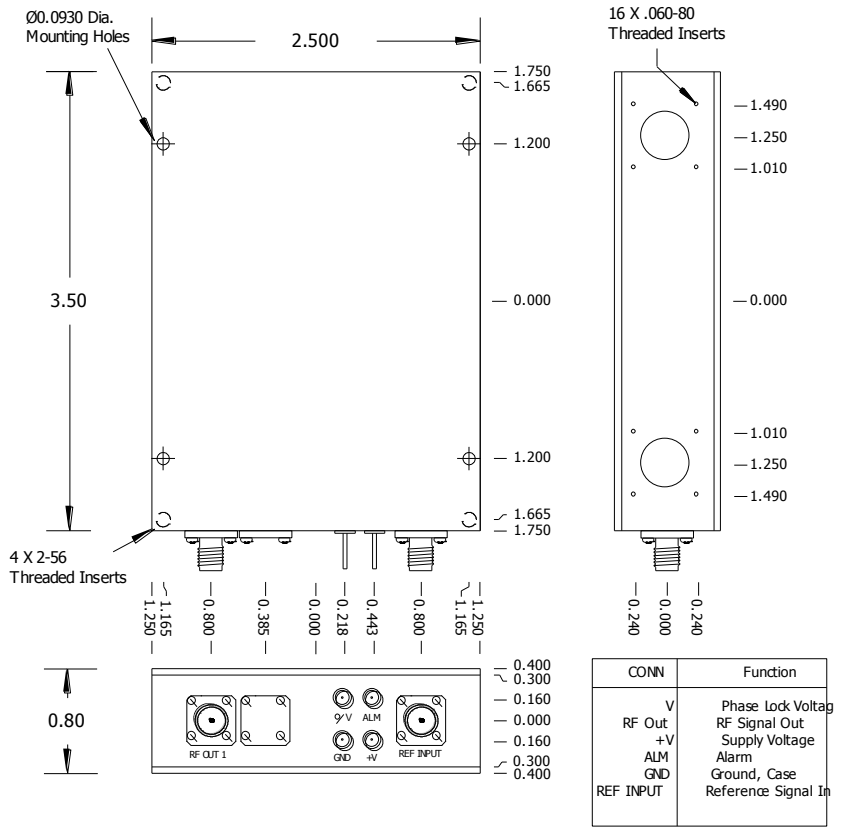

Wenzel Associates, Inc.
Austin, Texas

Title: **100 MHz-SC Phase Lock Crystal Oscillator (ROHS)**

P/N: 501-17448	Rev: -	Date: 04-13-07	Drawn:	Ref: 501-10137b
--------------------------	-----------	--------------------------	--------	--------------------

Tolerances: (except as noted) Dimensions are in inches	0.XX Dec: ±0.030"	0.XXX Dec: ±0.010"	FSCM: 62821	Page 1 of 1
--	-----------------------------	------------------------------	-----------------------	-------------