

| REV | DATE | REVISION RECORD | DWN | AUTH |
|-----|----------|--------------------|-----|------|
| - | 04-19-11 | Initial Release | PAC | |
| A | 08-28-12 | Drawing; Bandwidth | PAC | |
| | | | | |
| | | | | |
| | | | | |

INPUT

Frequency

10 MHz, $\pm 1 \times 10^{-7}$

Level

+7 dBm ± 5 dB into 50 ohms

OUTPUT

Frequency

80 MHz

Level

+13 dBm ± 2 dB into 50 ohms

STABILITY

Output Phase Noise L(f)
(Free-Running)

100 Hz -130 dBc/Hz
 1 kHz -158 dBc/Hz
 10 kHz -176 dBc/Hz
 100 kHz -176 dBc/Hz

Aging

$\pm 1 \times 10^{-6}$ per year after 30 days operating, typical

Temperature Stability

$\pm 5 \times 10^{-7}$ free-running from 0 to +50°C, (Ref. +25°C)

Phase Lock Alarm

TTL
 Locked: +3.5 VDC to +5.2 VDC (Hi)
 Out-of-Lock: +0.8 VDC max (Lo)

Phase Lock Voltage Monitor

Voltage monitor pin supplied

Harmonics

≤ -30 dBc

Sub-Harmonics

≤ -50 dBc

PLL Divider Products

≤ -60 dBc

Spurious

≤ -70 dBc, excluding power supply line related spurs

MECHANICAL

Dimensions

2.5 x 3.5 x 0.8"

Connectors

SMA(f)'s and solder pins on side
 Feed-thru terminals for lock alarm, supply and phase lock voltage monitor

Packaging

Nickel-plated machined aluminum housing

Mounting

Tapped holes on sides, 16 places
 Through holes, 4 places
 Threaded inserts on base, 4 places

POWER REQUIREMENTS

Supply Voltage

+15 VDC $\pm 5\%$

Warm-Up Power

≤ 8 Watts at start-up for 5 minutes at +25°C

Total Power

≤ 5 Watts at steady state +25°C

ADJUSTMENT

Loop BW

Target Bandwidth: < 5 Hz
 Type 2 Loop

CRYSTAL


Type


80 MHz SC-cut

OTHER

Test Data

Output Level
 Phase Noise (free-running)
 Temperature Stability (free-running)
 Harmonics, PLL Products, Spurious

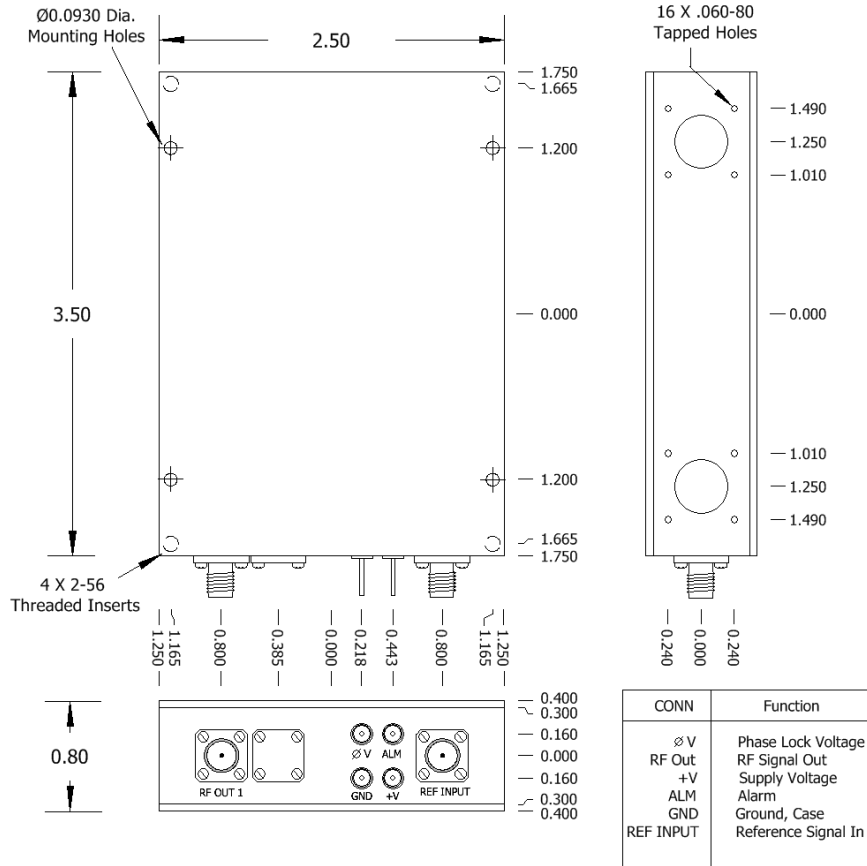



Wenzel Associates, Inc.
Austin, Texas

Title: **Premium 80 MHz-SC Phase Lock Crystal Oscillator**

| | | | | |
|--|------------------|-----------------------------|------------------------------|-----------------------|
| P/N: 501-23915 | Rev: A | Date: 08-28-12 | Drawn: | Ref: ULN |
| Tolerances: (except as noted) Dimensions are in inches | | 0.XX Dec: ±0.030" | 0.XXX Dec: ±0.010" | FSCM: 62821 |

Page 1 of 1