

INPUT**Frequency**10 MHz, $\pm 2 \times 10^{-6}$ **Level**+7 dBm ± 5 dB into 50 ohms**OUTPUT****Frequency**

100 MHz

Level+13 dBm ± 2 dB into 50 ohms**STABILITY****Output Phase Noise L(f)
(Free-Running)**

100 Hz -128 dBc/Hz

1 kHz -155 dBc/Hz

10 kHz -170 dBc/Hz

100 kHz -171 dBc/Hz

Aging $\pm 1 \times 10^{-6}$ per year after 30 days
operating, typical**Temperature Stability** $\pm 5 \times 10^{-7}$ free-running from 0 to +50°C,
(Ref. +25°C)**Phase Lock Alarm**

TTL

Locked: +3.5 VDC to +5.2 VDC (Hi)

Out-of-Lock: +0.8 VDC max (Lo)

Phase Lock Voltage Monitor

Voltage monitor pin supplied

SPECTRAL PURITY**Harmonics** ≤ -30 dBc**Sub-Harmonics** ≤ -50 dBc**PLL Divider Products** ≤ -60 dBc**Spurious** ≤ -70 dBc**MECHANICAL****Dimensions**

2.5 x 3.5 x 0.8"

ConnectorsSMA's and solder pins on side
Feed-thru terminals for lock alarm,
supply and phase lock voltage monitor**Packaging**Nickel-plate machined
aluminum housing**Mounting**

Tapped holes on sides, 16 places

Through holes, 4 places

Threaded inserts on base, 4 places

POWER REQUIREMENTS**Supply Voltage**+15 VDC $\pm 5\%$ **Warm-Up Power** ≤ 8 Watts at start-up for 5 minutes
at +25°C**Total Power** ≤ 5 Watts at steady state +25°C**ADJUSTMENT****Loop BW**

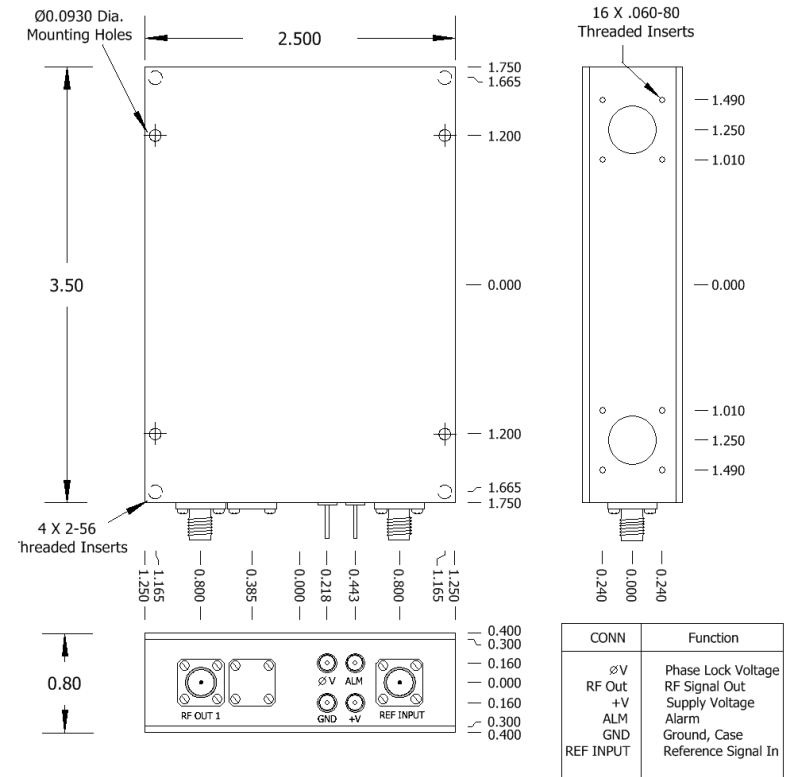
Target Bandwidth: < 5 Hz

Type 2 Loop

CRYSTAL**Type**

SC-cut

| REV | DATE | REVISION RECORD | DWN | AUTH |
|-----|----------|-----------------|-----|------|
| - | 10-11-11 | Initial Release | PAC | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

**Wenzel Associates, Inc.**

Austin, Texas

Title:

Standard 100 MHz-SC Phase Lock Crystal Oscillator

P/N:

501-25058

Rev.:

-

Date:

10-11-11

Drawn:

Ref.:

SPR

Tolerances:
(except as noted)
Dimensions are in inches

0.XX Dec:

 ± 0.030 "

0.XXX Dec:

 ± 0.010 "

FSCM:

62821

Page 1 of 1